SIEMENS

Data sheet

3RV2711-1JD10



Circuit breaker size S00 for system protection with approval circuit breaker UL 489, CSA C22.2 No.5-02 A-release 10 A N release 130 A screw terminal Standard switching capacity

product brand name	SIRIUS		
product designation	Circuit breaker		
design of the product	For system protection according to UL 489/CSA C22.2 No. 5		
product type designation	3RV2		
General technical data			
size of the circuit-breaker	S00		
product extension auxiliary switch	Yes		
power loss [W] for rated value of the current			
 at AC in hot operating state 	9.25 W		
 at AC in hot operating state per pole 	3.1 W		
insulation voltage with degree of pollution 3 at AC rated value	690 V		
surge voltage resistance rated value	6 kV		
shock resistance according to IEC 60068-2-27	25 g / 11 ms (rectangular impulse and sine pulse)		
mechanical service life (operating cycles)			
 of the main contacts typical 	100 000		
 of auxiliary contacts typical 	100 000		
electrical endurance (operating cycles) typical	100 000		
reference code according to IEC 81346-2	Q		
Substance Prohibitance (Date)	10/01/2009		
Ambient conditions			
installation altitude at height above sea level maximum	2 000 m		
ambient temperature			
 during operation 	-20 +60 °C		
 during storage 	-50 +80 °C		
during transport	-50 +80 °C		
relative humidity during operation	10 95 %		
Main circuit			
manreneuit			
number of poles for main current circuit	3		
	3		
number of poles for main current circuit	3 20 690 V		
number of poles for main current circuit operating voltage			
number of poles for main current circuit operating voltage • rated value	20 690 V		
number of poles for main current circuit operating voltage • rated value • at AC-3 rated value maximum	20 690 V 690 V		
number of poles for main current circuit operating voltage • rated value • at AC-3 rated value maximum • at AC-3e rated value maximum	20 690 V 690 V 690 V		
number of poles for main current circuit operating voltage • rated value • at AC-3 rated value maximum • at AC-3e rated value maximum operating frequency rated value	20 690 V 690 V 690 V 50 60 Hz		
number of poles for main current circuit operating voltage • rated value • at AC-3 rated value maximum • at AC-3e rated value maximum operating frequency rated value operational current rated value	20 690 V 690 V 690 V 50 60 Hz		
number of poles for main current circuit operating voltage • rated value • at AC-3 rated value maximum • at AC-3e rated value maximum operating frequency rated value operational current rated value operational current	20 690 V 690 V 690 V 50 60 Hz 10 A		
number of poles for main current circuit operating voltage • rated value • at AC-3 rated value maximum • at AC-3e rated value maximum operating frequency rated value operational current rated value operational current • at AC-3 at 400 V rated value	20 690 V 690 V 690 V 50 60 Hz 10 A		
number of poles for main current circuit operating voltage • rated value • at AC-3 rated value maximum • at AC-3e rated value maximum operating frequency rated value operational current rated value operational current • at AC-3 at 400 V rated value • at AC-3e at 400 V rated value	20 690 V 690 V 690 V 50 60 Hz 10 A		

— at 400 V rated value	4 kW				
— at 500 V rated value	5.5 kW				
— at 690 V rated value	7.5 kW				
• at AC-3e					
— at 230 V rated value	2.2 kW				
— at 400 V rated value	4 kW				
— at 500 V rated value	5.5 kW				
— at 690 V rated value	7.5 kW				
operating frequency					
• at AC-3 maximum	15 1/h				
• at AC-3e maximum	15 1/h				
Protective and monitoring functions					
product function					
 ground fault detection 	No				
 phase failure detection 	No				
design of the overload release	thermal				
maximum short-circuit current breaking capacity (Icu)					
at AC at 240 V rated value	100 kA				
• at AC at 400 V rated value	100 kA				
at AC at 500 V rated value	42 kA				
at AC at 690 V rated value	6 kA				
 at 480 AC Y/277 V according to UL 489 rated value 	65 kA				
operating short-circuit current breaking capacity (Ics) at AC					
at 240 V rated value	100 kA				
at 400 V rated value	100 kA				
at 500 V rated value	42 kA				
at 690 V rated value	4 kA				
	130 A				
response value current of instantaneous short-circuit trip unit	130 A				
Short-circuit protection	No.				
product function short circuit protection	Yes				
de el eur eff Alex, els est, el us sitt Anto					
design of the short-circuit trip	magnetic				
design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit	magnetic				
design of the fuse link for IT network for short-circuit					
design of the fuse link for IT network for short-circuit protection of the main circuit	gG 50 A				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V	gG 50 A gG 40 A				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V	gG 50 A				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions	gG 50 A gG 40 A gG 40 A				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position	gG 50 A gG 40 A gG 40 A any				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method	gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height	gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width	gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth	gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing	gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V	gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards	gG 50 A gG 40 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards	gG 50 A gG 40 A gG 40 A gG 40 A * screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side	gG 50 A gG 40 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V	gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards	gG 50 A gG 40 A gG 40 A gG 40 A screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V downwards upwards at the side • for live parts at 400 V downwards upwards upwards upwards upwards upwards upwards upwards upwards upwards upwards	gG 50 A gG 40 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — at the side • for live parts at 400 V — downwards — at the side • at the side	gG 50 A gG 40 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 97 mm 30 mm 30 mm 30 mm				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — at the side • for live parts at 400 V — downwards — at the side • for grounded parts at 500 V	gG 50 A gG 40 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — at the side • for grounded parts at 500 V — downwards	gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — at the side • for live parts at 400 V — downwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side	gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V downwards upwards at the side • for live parts at 400 V downwards at the side • for live parts at 400 V downwards upwards at the side • for grounded parts at 500 V downwards upwards at the side • for grounded parts at 500 V downwards upwards at the side	gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V	gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — upwards — at the side	gG 50 A gG 40 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — upwards — upwards — at the side • for live parts at 500 V — downwards — upwards — upwards	gG 50 A gG 40 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 97 mm 30 mm				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — at the side • for live parts at 500 V — downwards — at the side • for live parts at 500 V — downwards — at the side • for live parts at 500 V — downwards — at the side	gG 50 A gG 40 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm				
design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — upwards — upwards — at the side • for live parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — upwards — upwards — at the side	gG 50 A gG 40 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 97 mm 30 mm				

			=0				
— upwards			70 mn	1			
— backwards			0 mm				
— at the side			30 mn	1			
— forwards			0 mm				
 for live parts at 6 							
— downwards			70 mn				
— upwards			70 mm				
— backwards			0 mm				
— at the side			30 mn	30 mm			
— forwards			0 mm				
Connections/ Terminals	;						
type of electrical conr	nection						
 for main current 	circuit		screw-type terminals				
arrangement of electr circuit	ical connectors for main	current	Top a	Top and bottom			
type of connectable c	onductor cross-sections						
 for main contacts 	3						
— solid or stra	anded		1 10) mm², max. 2x 10 mm²			
- finely strand	— finely stranded with core end processing		1 16 mm², max. 6 + 16 mm²				
 for AWG cables f 	for main contacts		2x (14 10)				
tightening torque			,				
• • •	with screw-type terminals	5	2.5	3 N·m			
	design of screwdriver shaft		Diameter 5 to 6 mm				
size of the screwdrive	r tip		Pozidi	iv size 2			
design of the thread o	of the connection screw						
 for main contacts 	6		M4				
Safety related data							
B10 value							
 with high demand 	d rate according to SN 319	920	5 000				
proportion of dangero							
		20	50 %				
 with low demand rate according to SN 31920 with high demand rate according to SN 31920 		50 %					
failure rate [FIT]		.20	00 /0				
with low demand rate according to SN 31920		50 FIT					
	nterval or service life acco		50 FTT 10 a				
61508		J.					
-	the front according to IE		IP20				
•	ne front according to IEC	60529	finger-safe, for vertical contact from the front				
display version for swite	ching status		Handl	e			
Certificates/ approvals							
General Product App	roval					Declaration of Con- formity	
Confirmation	(\mathbf{m})	Ē		<u>KC</u>	FAC	CE	
					נחנ	EG-Konf.	
Declaration of Con- formity	Test Certificates			Marine / Shipping		other	
UK CA	Special Test Certific- ate	<u>Type Test Cert</u> ates/Test Rep		BUREAU VERITAS	Hoyd's Register uis	<u>Confirmation</u>	
other	Railway						





Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10 Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2711-1JD10

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2711-1JD10

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2711-1JD10


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2711-1JD10&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2711-1JD10/char

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2711-1JD10&objecttype=14&gridview=view1

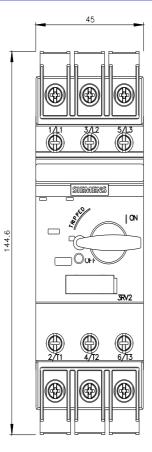

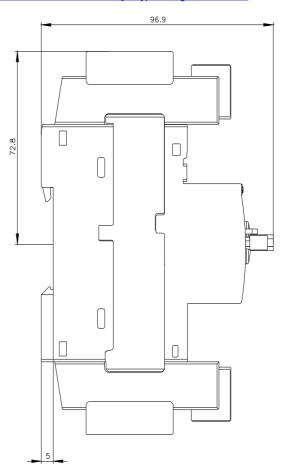

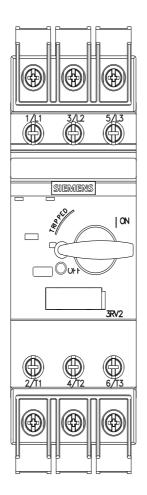

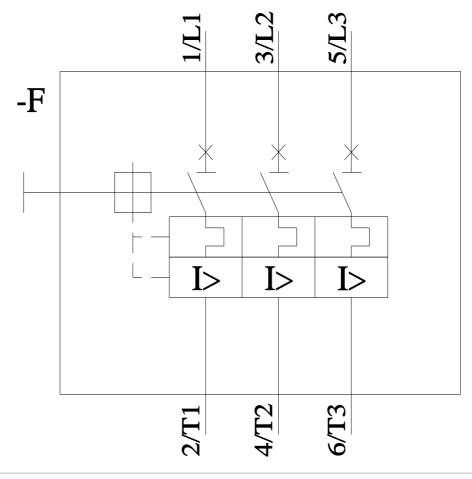

5/1/2023 🖸